




SMOKE DETECTOR

SL-2000



The SL-2000 series duct smoke detectors will provide early detection of smoke and products of combustion present in the air moving through HVAC ducts in any commercial, industrial, or residential application. These devices are designed for the prevention of smoke re-circulation by the air handling systems, fans, and blowers. The SL-2000 is designed and built to meet all local requirements, as well as the NFPA regulations, regarding duct smoke detectors. Output terminals are provided for remote accessories such as horns, strobes, remote status indicators, and test/reset key switches or pushbuttons. Air sampling is accomplished via two tubes that protrude into the duct. An exhaust tube with a standard length of 7" is supplied in the installation kit with the unit. Once the duct size is

determined, a sampling tube should be ordered. Three standard sizes including a 1', 2.5', 5', and 10' lengths can be ordered and cut to the correct size of the duct. The SL-2000 provides two sets of 10A form "C" and one set of a 2A form "A" alarm contacts, along with one set of 10A form "C" trouble contacts for monitoring head removal and supply voltage failure.

The ACI remote accessories are designed to be used with the ACI Duct Smoke detectors to provide audible and visual indication as well as remote test/reset functions. These devices mount to a standard single or double gang electrical backbox. Remote accessories are usually required by the AHJ (Inspector) for installation. If a duct smoke detector is not wired to a fire system or a remote test station, when the unit goes into alarm, the end user would have to climb up to the duct to manually reset the unit. ACI offers two series of remote accessories, The MS Series and the MSR-50R Series.

Applications: Smoke Detection in HVAC Ducts in Commercial, Industrial & Residential Applications

The SL-2000 Series is covered by ACI's Two (2) Year Limited Warranty. The warranty can be found in the front of ACI's Sensors & Transmitters catalog, as well as on ACI's web site, workaci.com.


PRODUCT SPECIFICATIONS

| | |
|---|--|
| Supply Voltage: | 24 VAC/VDC, 115 VAC, 230 VAC |
| Maximum Operating Current (Standby): | 24 VDC: 14 mA 24 VAC: 55 mA 115 VAC: 22 mA 230 VAC: 12 mA |
| Maximum Operating Current (Alarm): | 24 VDC: 68 mA 24 VAC: 190 mA 115 VAC: 32 mA 230 VAC: 18 mA |
| Alarm Relay Contacts: | Resistive Load: 2 sets form "C" rated at 10 Amps @ 115 VAC Resistive Load: 1 set form "A" rated at 2 Amps |
| Trouble Relay Contacts: | Resistive Load: 1 set form "C" rated at 10 Amps @ 115 VAC |
| Detection Head Type: | Photoelectric |
| Air Velocity: | 100 to 4,000 ft / minute |
| Wiring Connections: | Screw Terminal Blocks |
| Conductor Size: | Solid or Stranded: #12 to #22 AWG |
| Operating Temperature (SL-2000-N): | 32°F to 158°F (0°C to 70°C) |
| Operating Temperature (SL-2000-P): | 32°F to 140°F (0°C to 60°C) |
| Maximum Operating Humidity Range: | 85 ± 5 % RH (@32 ± 2°C; 86 ± 3.6°F) Non-Condensing / Non-Freezing |
| Enclosure Material: | Grey plastic backbox, clear plastic cover (Makrolon 94V-0) |
| NEMA Rating: | NEMA 1 |
| Hardware Included: | 7" exhaust tube, sampling tube end cap, mounting template, test magnet, & mounting hardware |
| Enclosure Product Dimensions: | (L) 13.5" (342.9 mm) x (W) 4.5" (114.3 mm) x (H) 2.25" (57.15 mm) |
| Product Weight: | 2.5 lbs (1.13 kg) |
| Agency Approvals: | UL & CUL Listed (UL268A, UROX, UROX7) File # S2829 CSFM Listed (3240-1004:105) MEA Accepted (73-92-E; VOL. 27) |





DIMENSIONAL DRAWING

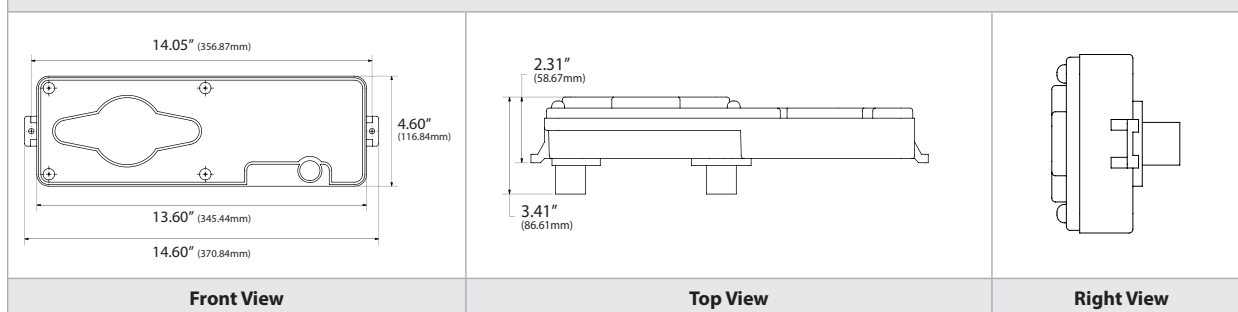

STANDARD ORDERING

| Model # | Item # | Description |
|-----------|--------|--|
| SL-2000-P | 105792 | Smoke Detector, Multi-Application, Photoelectric |

SAMPLING TUBE ORDERING

| Model # | Item # | Description |
|-----------|--------|---|
| FAST TUBE | 131201 | Package of (3) 24" Sections Sectional sampling tube, quickly assembled to length & UL |
| STN-1.0 | 111653 | Sampling Tube for 12" or less duct width |
| STN-2.5 | 105793 | Sampling Tube for 6" to 2.5' duct width |
| STN-5.0 | 105794 | Sampling Tube for 2.5' to 5.0' duct width |
| STN-10.0 | 105795 | Sampling Tube for 5.0' to 10.0' duct width |

Note: Sampling Tubes are required and should cover 80% of duct width.

ACCESSORIES ORDERING

| Model # | Item # | Description |
|-------------------|--------|---|
| WP-2000 ENCLOSURE | 106505 | Weatherproof Enclosure, NEMA type 3R |
| 55000-335DCT | 152738 | Replacement Photoelectric Detector Head |
| TG-2000 | 128407 | Aerosol Test Gas |

ACCESSORIES ORDERING

| Model # | Item # | Description |
|----------------|--------|---|
| MSR-50RKA/W | 146753 | Remote with Key, Sounder, White Double Gang Plate |
| MSR-50RKAV/W/C | 146754 | Remote with Key, Strobe, Sounder, White Double Gang Plate |
| MS-KA/R | 111733 | Remote with Key, LED for Alarm, Single Gang Plate |